

ELECTRIC VALVES

RN SOLENOID




24 VAC

9 VDC

Solenoids are equipped with a handle adaptor, facilitating the manual opening and closing of valves with internal bleed. Easy, comfortable and safe operation inside of a valve box.

Solenoid's thread: 3/4" - 20" UNF standard

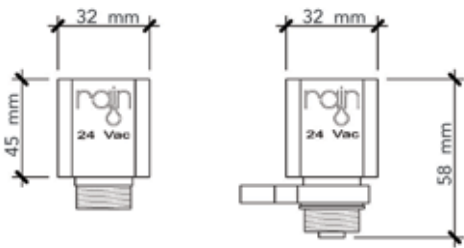

RN 3-WAY SOLENOID



24 VAC

9 VDC

TECHNICAL FEATURES

- Function: 3-way N/O (normally open)
 - Port size: 1/8" BSP & NPT
 - Orifice: 1.8 mm
 - Materials in contact with media:
 - Manual override: reinforced nylon
 - Main valve: reinforced nylon
 - Seals: EPDM
 - Spring: stainless steel
 - Manual Override
 1. A - Auto (COM port 3 open)
 2. Turn clockwise (COM port 1 open)
 3. Turn counter-clockwise (COM port 3 open)
 - Colors:
 - Orange: 24 VAC solenoid
 - Blue: latching solenoid
- Optional COM port: you can choose between "COM" on the side or "COM" at the bottom of the valve, while the other port is plugged in.

OPERATING CONDITIONS

- Pressure range: 0 - 10 bar
- Temperature range:
 - Water passing through 5°C - 50°C
 - External environment -10°C - 50°C

