


# 427B AG-U



**Applications:** Specifically designed for irrigation of field edges

- Spacing up to 14 m
- Color-coded bayonet nozzles for easy service
- Integrated stream-straightening vane for maximum range
- High-impact, heavy-duty plastic materials provide resistance to corrosion, chemicals and UV radiation
- WP - Hammer ensures all water inside the irrigation pattern and prevents irrigating roads and neighbors.


**427B AG U PERFORMANCE TABLE**

Nozzle color (mm)	P (bar)	Q (m <sup>3</sup> /h)	D (m)
2.8 Orange	2.0	0.450	22
	3.0	0.550	23
	4.0	0.630	24

\* Performance table prepared under laboratory conditions  
\* For windy conditions use closer spacing

## IrriStand systems

Plastic impact sprinkler  
1/2" male or 3/4" female mounted  
on IrriStand 52 or riser

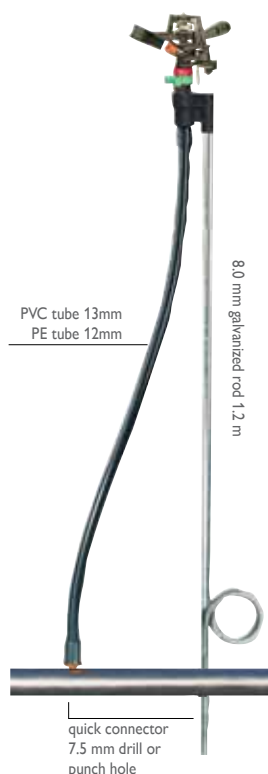

**Connectors & Accessories for IrriStand 52**

Description	Catalog no.	
Adaptor for IrriStand 52, 53	482820	
LPD IrriStand data on page 16	790512	
Male connector	830902	
Female connector	830904	
Plug	830906	
Elbow connector	6431040215	
Quick Drill 7.5mm	6130210420	
7.5 mm Punch & Pusher	6130210424	

